

DIRECT FIRED TEMPERATURE CONTROL WITH INTEGRAL SELECTOR

DFC-2


The **DFC-2** is a microprocessor based control that uses an intelligent PID software algorithm to modulate gas flow in direct fired make up air applications.




- ◆ Built in 15 Second Low Fire Start Timer
- ◆ 0-24V DC Modulating Output
- ◆ 24V AC Power
- ◆ Calibration Trim Pot
- ◆ Fits 1/4" Wiring Terminals
- ◆ Rated for -40°F (-4°C)
- ◆ Industry Standard Mounting

DIRECT FIRED TEMPERATURE CONTROL WITH INTEGRAL SELECTOR

DFC-2

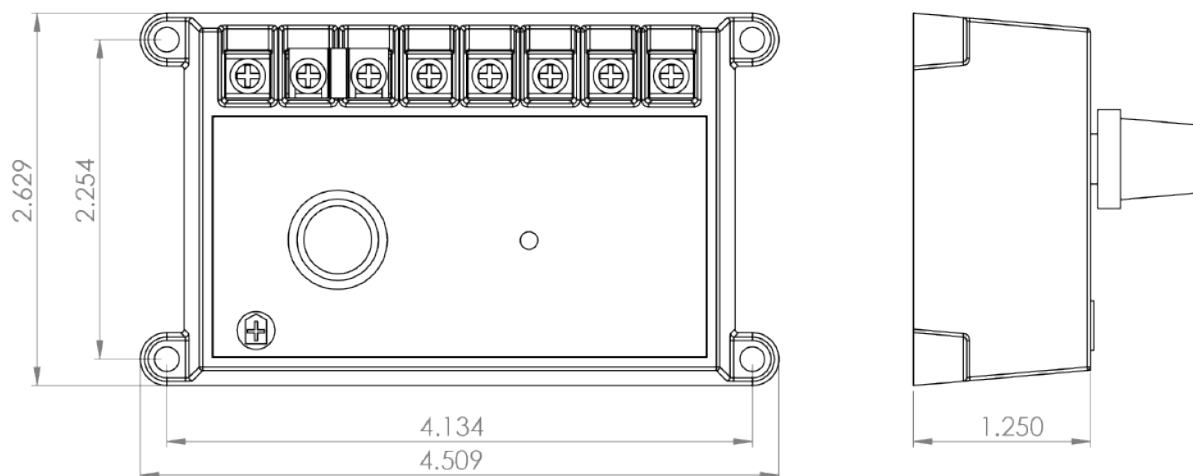

TS-01
Temperature Sensor

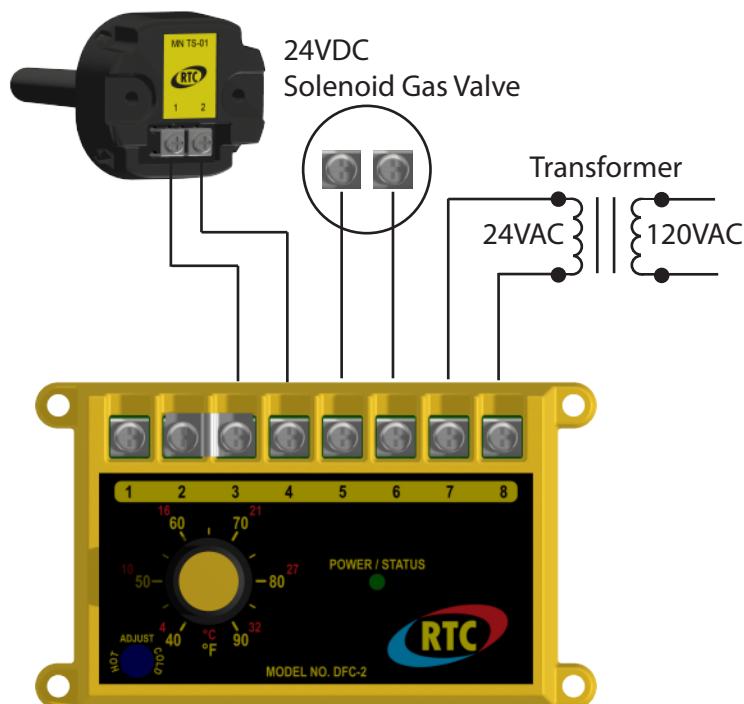

DFC-2 Specifications

Power Requirements	24VAC 50/60Hz 20V A Isolated Class II Transformer
DFC Ambient Temperature Limits	
Storage	-40°F -140°F (-40 - 60°C)
Operating	-40°F -140°F (-40 - 60°C)
Accuracy	40°F -250°F (4 - 121°C)

RTC Solutions
4380 Oakes Road, Suite 804
Davie Fl, 33314
Ph. (877) 351-4702

