

RDU+


The **RDU+** is an enhanced digital remote control with an eight button interface and full color LCD which allows the operator to easily change settings to accomodate their needs.



- ◆ Full Color LCD Display and Navigational Buttons
- ◆ RS485 Serial Communications
- ◆ Full Diagnostics
- ◆ Full 7 Day Schedule
- ◆ User Friendly Alarms
- ◆ For Use with Paint Spray Booths or Typical Make Up Air Applications
- ◆ Automated Energy Savings Features
- ◆ Remote Setup for DFC+

ENHANCED DIGITAL REMOTE DISPLAY UNIT

RDU+

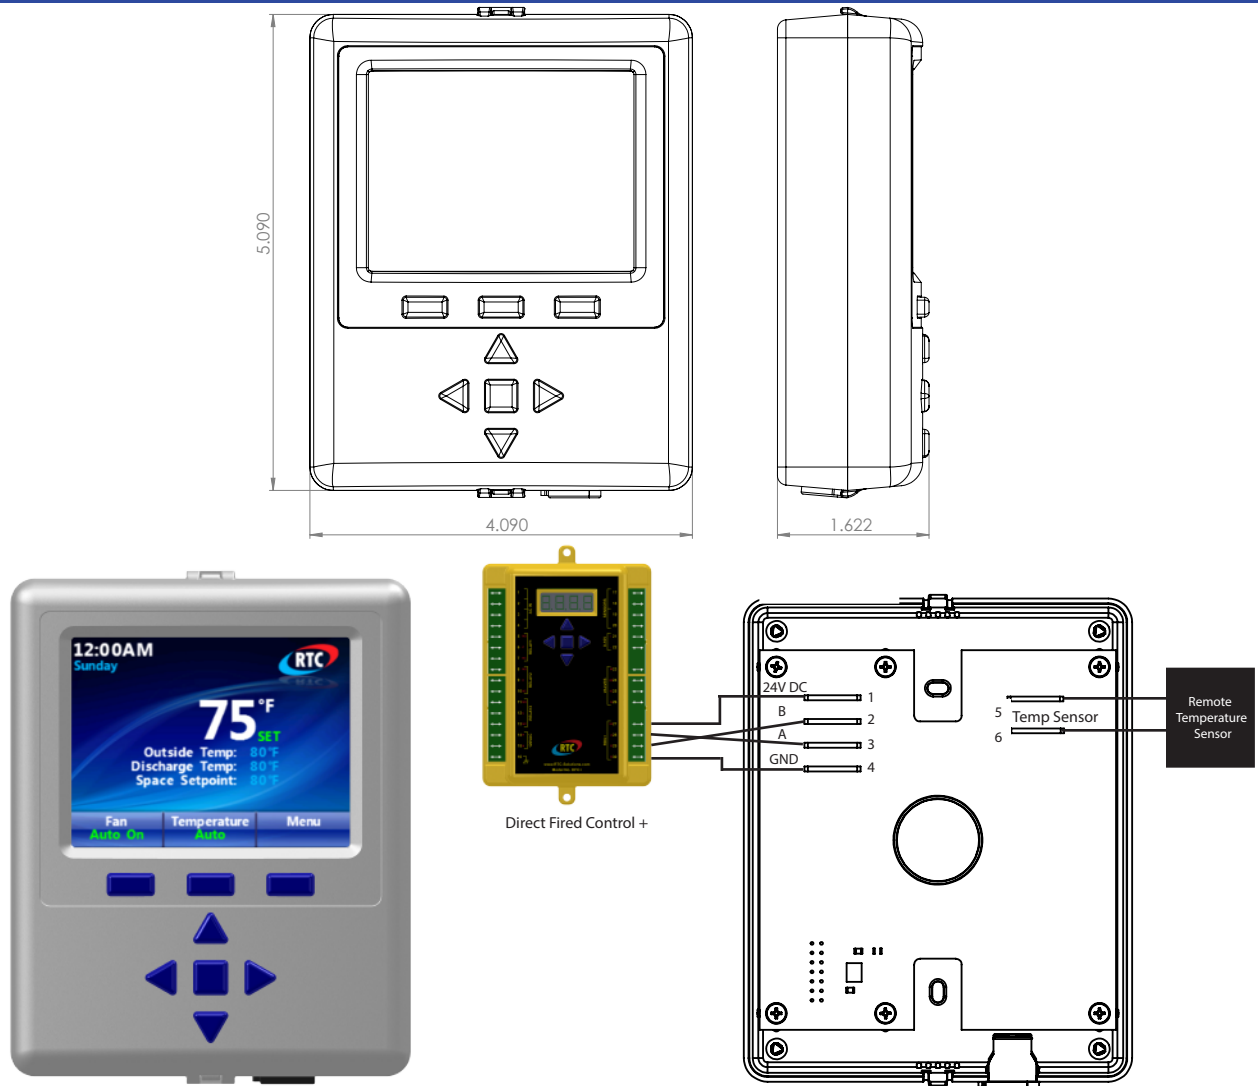

RDU+ Specifications

Power Requirements RDU+ Control RDU+ Real Time Clock	24V DC Supplied by DFC+ One Battery Lithium Coin (CR2450)
STS-1 Ambient Temperature Limits(1K PRTD) Storage Operating	-40-140°F (-40-60°C) -40-140°F (-40-60°C)
STS-2 Ambient Temperature Limits(1K PRTD) Storage Operating	-40-250°F (-40-121°C) -40-250°F (-40-121°C)
Accuracy	+/-3°F (1°C)

RTC Solutions
4380 Oakes Road, Suite 804
Davie Fl, 33314
Ph. (877) 351-4702

